

H206

AUDIOTEC
FISCHER
INNOVATIVE CAR AUDIO

Gleichstromwiderstand / DC restance	R_{dc}	3,4 Ω
Nennimpedanz / Nominal impedance	Z_N	4 Ω
Resonanzfrequenz Resonance frequency	f_s	67,18 HZ

Spulendurchmesser Voice coil diameter	25 mm
Spulenbreite / Voice coil height	10 mm

Mechanische Güte / Mechanical Q factor	Q_{ms}	4,02
Elektrische Güte / Electrical Q factor	Q_{es}	0,83
Gesamtgüte Total Q factor	Q_{ts}	0,69

Dynamisch bewegte Masse / Moving mass	m_d	10,51 g
---	-------	----------------

Effektive Membranfläche / Effective piston area	S_m	135 cm ²
---	-------	----------------------------

Mechanischer Widerstand / Mechanical resistance	R_{ms}	1,1 Kg/s
---	----------	-----------------

Nachgiebigkeit / Compliance	C_{ms}	0,53 mm/N
---------------------------------------	----------	------------------

Antriebsfaktor / Force factor	BL	4,27 Tm
---	------	----------------


Äquivalentvolumen / Equivalent air volume	V_{as}	13,67 dm ³
---	----------	------------------------------

Wirkungsgrad / Efficiency	η	0,48 %
-------------------------------------	--------	---------------


SPL 1W/1m	88,83 dB
------------------	-----------------

SPL 2,83V/1m	92,55 dB
---------------------	-----------------


Frequenzgang / Frequency response [1W/1m]

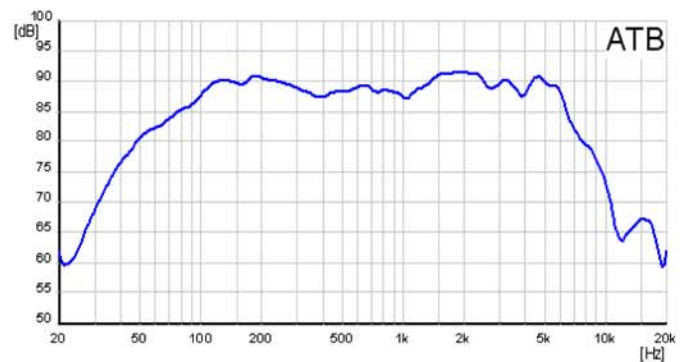

Impedanzverlauf / Impedance

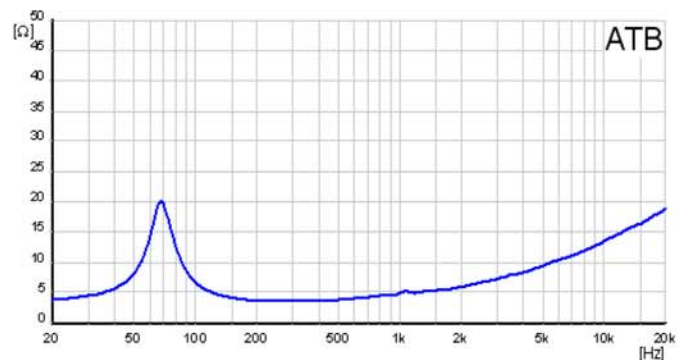

Klirrfaktoren / Harmonic Distortion [1w / 1m]

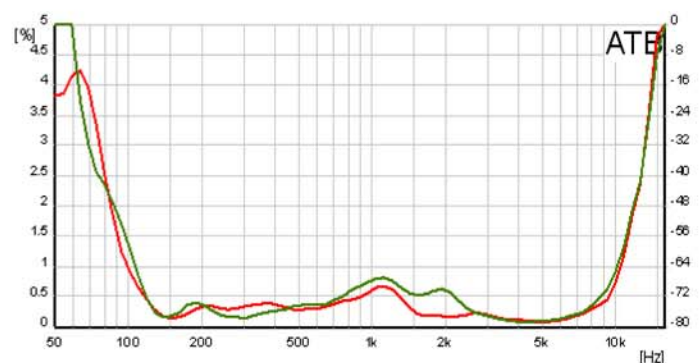

rot / red: K2

grün / green: K3